
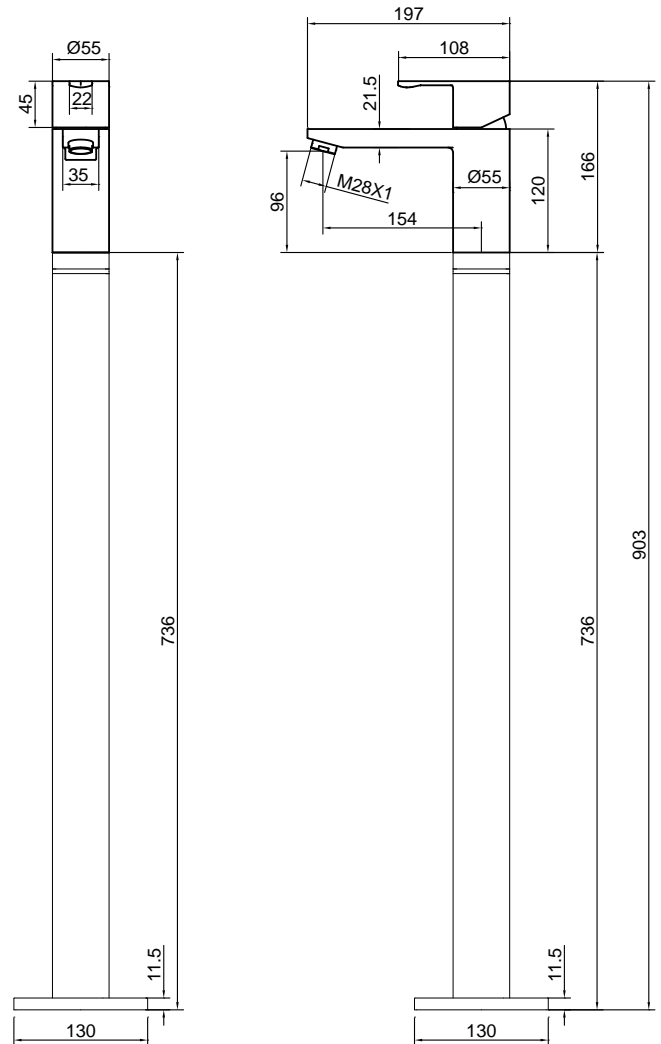


# CW24 CRYSTAL

vcboc  
FOR BATHROOMS

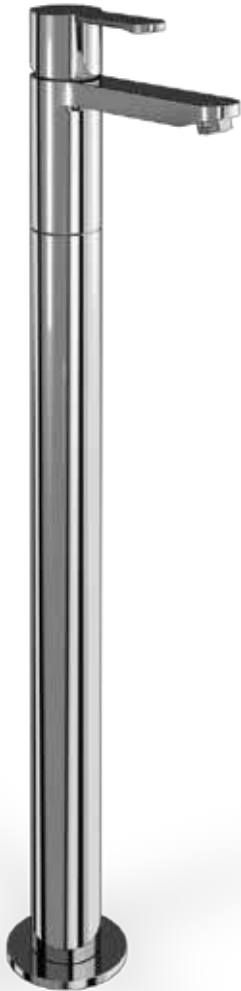

## CW24

- Dimensions: **5A3.1378** W 55mm H 166mm D 197mm  
**Shroud** W 130mm H 735mm D 130mm
- Engineered from solid brass and double dipped in chrome, giving these taps a spectacular finish. Plus an excellent WELS rating.
- 5 star WELS rating



# CW24 CRYSTAL

## Mono Bath Filler with Shroud




### INSTALLATION INSTRUCTIONS - CW24


#### THIS TAPWARE IS FOR MAINS PRESSURE ONLY.

- Please check this product immediately to ensure that it has not been damaged and is complete. Before installation, please make sure this product is the correct model and you have all the parts required for installation and using.
- Please read these instructions carefully and keep it for future reference.

#### Installation

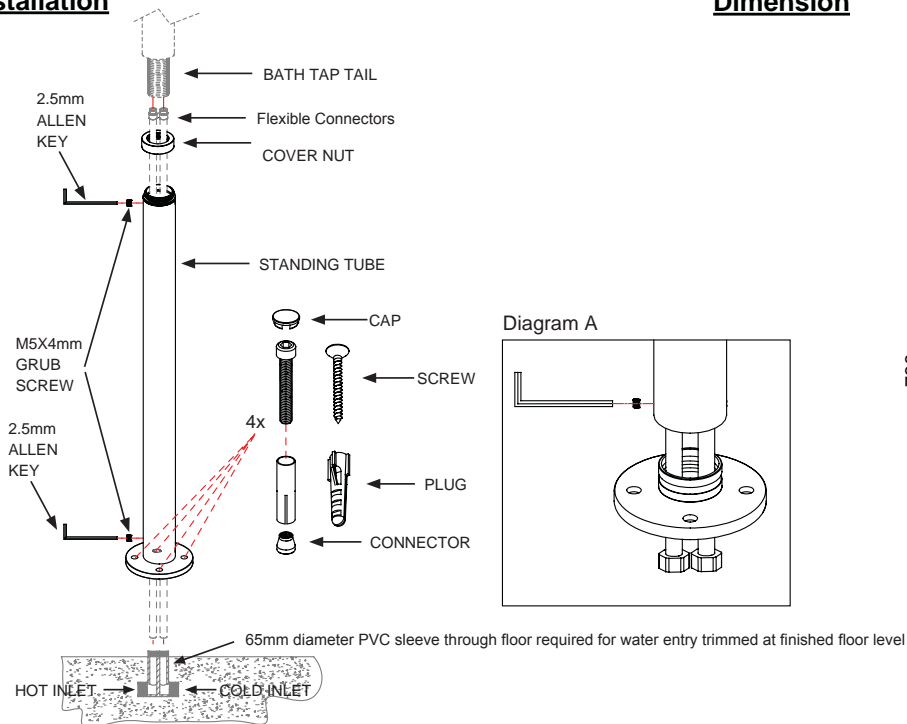

#### Dimension

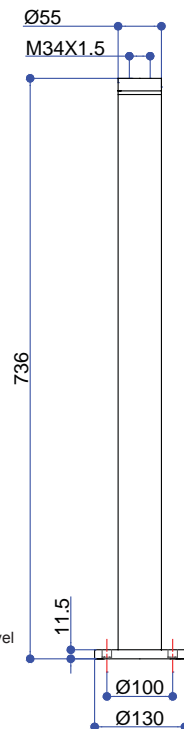

#### Installation Instructions for single level concrete floors - Mains Pressure Tapware Only

- The swivel connectors are 20mm for full bore flow and are installed below the finished floor surface as per Diagram A.
- A 65mm PVC vertical sleeve is recommended through the concrete floor and connected to a 100x65 level invert onto a 100mm PVC bend with a 500mm horizontal spigot under the pre slab. This will allow plenty of movement, to run and connect your water pipes that will run through this duct, into position later on.
- A vertical sleeve greater than 65mm will compromise the fixing plate and lead to an insecure stand pipe.
- At fit off the swivel connectors are then able to be connected onto your protruding water pipes and then easily lowered down into position below the floor and then the fixing plate installed.
- This is a fixed tap and stand pipe so please take this into consideration before you tighten the swivel connectors.
- To install the flexible connectors, screw these into the base of the tap first and then fit the stand pipe. Insert the flexible tails through the bottom plate one by one referring to diagram A for details. The metal braid pipe may crimp however this will not compromise the water pipe.
- Fix the standing tube on the floor with the supplied fittings ( one is for a concrete floor whilst the other is for a wooden floor).
- Complete the installation by fitting the chrome cover caps.
- This tapware must be installed by a licensed plumber, protected by inline filters and a PLV set to 3Bar.

# CW24 CRYSTAL

Mono Bath Filler with Shroud

**vcloc**  
FOR BATHROOMS

## INSTALLATION INSTRUCTIONS - CW24

### THIS TAPWARE IS FOR MAINS PRESSURE ONLY.

- Please check this product immediately to ensure that it has not been damaged and is complete. Before installation, please make sure this product is the correct model and you have all the parts required for installation and using.
- Please read these instructions carefully and keep it for future reference.



1: Connect the bath filler with the leg.



2: Insert one hose through the bottom plate.



3: Insert the other hose through the bottom plate as shown below.



4: Done.



Note: Flexible hoses stick out by 50mm



Note: Under some pressure the sticking out length can be reduced to 35mm.

### Maintenance

We do NOT recommend you use any household cleaners to clean the product. Because these cleaners change substance or formula too frequently. The product should only be cleaned with soapy water, rinsed with clean water and dried with a soft cloth.